


Refractive Power / Corneal Analyzer OPD-Scan III (VS)



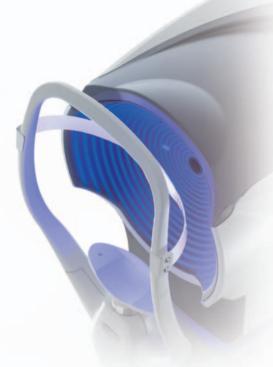

Experience the Visual System

The OPD-Scan III VS is an aberrometer providing optimal and facilitated eyeglass prescription with detailed measurement data.

The easy-to-understand reports displayed on a tablet allow simple explanation of examination results.

This unit opens a variety of business possibilities as a new communication tool.



Solutions for Face-to-face Consulting

Tablet viewer provides three kinds of easy-to-understand reports for explanation and consulting.



Comprehensive Vision Analysis

OPD-Scan III VS is a device that mainly measures corneal shape (topographer) and refractive error (refractometer). It clarifies causes of vision difficulties through wavefront analysis of information measured over a wide area.



Wavefront Aberrometer

Unprecedented assessment of visual acuity and quality of vision.

Topographer

Intuitive maps and numerical data of the corneal surface.

Auto Refractometer

Exceptionally accurate refraction for various pupil diameters even under photopic and mesopic conditions.

Auto Keratometer

Conventional keratometry and novel corneal surface descriptors.


Pupillometer

Measurement of photopic and mesopic pupil diameters.



Basic Information Report

Basic information to generally judge the patient's eye conditions.

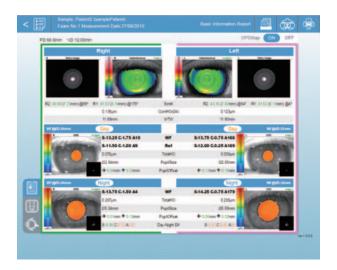



Simulation Report


Visual performance simulations and MTF graphs for a variety of conditions.






Eye Diagram Image Report

Eye model to visually understand eye conditions ranging from eye fundus to cornea.

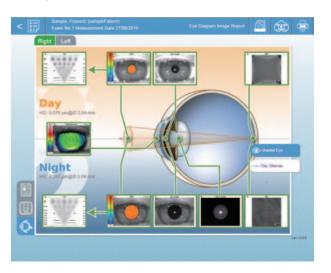

Wide Range of Display Patterns





OPD map

Distribution of refractive error

Axial map

Distribution of corneal curvature radius / corneal refractive power






Instantaneous map

Distribution of corneal curvature radius / corneal refractive power

Eye image

Image of anterior eye segment






Retro image

Retroillumination image



to the patient






MTF (Modulation Transfer Function) graph

Graph of contrast analysis

VA (Visual Acuity) map

Simulation of how the VA chart appears to the patient *Landolt/ETDRS/Snellen charts are available.



OPD-Scan III Specifications

Wavefront aberrometer	
Measurement principle	Automated objective refraction (dynamic skiascopy)
Spherical power range	-20.00 to +22.00 D
Cylindrical power range	0 to ±12.00 D
Axis range	0 to 180°
Measurement area	ø2.0 to 9.5 mm (7 zone measurement)
Data point	2,520 points (7 x 360)
Map type	OPD, PSF, MTF graph, Visual Acuity
Topographer	
Measurement rings	33 vertical, 39 horizontal
Measurement area	Ø0.5 to 11.0 mm (R = 7.9 mm)
Data point	11,880 points and more
Map type	Axial, Instantaneous
Auto refractometer	
Measurement range	Sphere -20.00 to +22.00 D
	Cylinder 0 to ±12.00 D
	Axis 0 to 180°
Minimum measurable pupil diameter	ø2.6 mm
Auto keratometer	
Measurement range	Curvature radius 5.00 to 10.00 mm
- -	Refractive power 33.75 to 67.50 D (n = 1.3375)
	Astigmatism 0 to ±12.00 D
	Axis 0 to 180°
Measurement area	ø3.3 mm (R = 7.7 mm)
Pupillometer/Pupillographer	
Measurement diameter	1.0 to 10.0 mm
Image type	Photopic, Mesopic
Auto tracking	X-Y-Z directions
Display	10.4-inch color LCD touch screen
Printer	Built-in thermal type line printer for data print
	External color printer (optional) for report print
Interface	RS-232C, LAN: 1 port each
	USB: 4 ports
Power supply	AC 100 to 240 V
	50/60 Hz
Power consumption	110 VA
Dimensions/Mass	284 (W) x 525 (D) x 533 (H) mm / 23 kg
	11.2 (W) x 20.7 (D) x 21.0 (H)" / 51 lbs.
Standard accessories	Printer paper, Power cord, Dust cover, Chinrest paper, Fixing pins for chinrest paper, Spherical model eye, Touch pen,
	Touch pen stand, Ferrite core, Installation CD for OPD Web Viewer System, Installation manual for OPD Web Viewer System
Optional accessories	Communication cable, Eye Care card system, Barcode reader, Magnetic card reader

Product/Model name: Refractive Power / Corneal Analyzer OPD-Scan III
Brochure and listed features of the device are intended for non-US practitioners.
Specifications may vary depending on circumstances in each country.
Specifications and design are subject to change without notice.
The tablet described in this brochure is not included or sold with the OPD-Scan III VS.



HEAD OFFICE (International Div.) 34-14 Maehama, Hiroishi-cho, Gamagori, Aichi 443-0038, JAPAN TEL: +81-533-67-8895 URL: www.nidek.com [Manufacturer]

URL: www.nidek.com

NIDEK TECHNOLOGIES S.R.L. Via dell'Artigianato, 6/A, 35020 Albignasego (Padova), ITALY

6/A, 35020 Albignasego (Padova),
ITALY
Ning Rd, Chang Ning Dis
TEL:+39 049 8629200/8626399
URL: www.nidektechnologies.it
TEL:+86 021-5212-7942
URL: www.nidek-china.cn

NIDEK (SHANGHAI) CO., LTD. Rm3205, Shanghai Multi Media Park, No. 1027 Chang Ning Rd, Chang Ning District, Shanghai, CHINA 200050 TEL: 486 021-5212-7942

NIDEK SINGAPORE PTE. LTD.
51 Changi Business Park
Central 2, #06-14, The
Signature 486066,
SINGAPORE
TEL: +65 6588 0389
URL: www.nidek.sa